


Typ uszczelnienia :

K1

Materiał: NBR; PU

Szybkość przesuwu – 0,5m/s

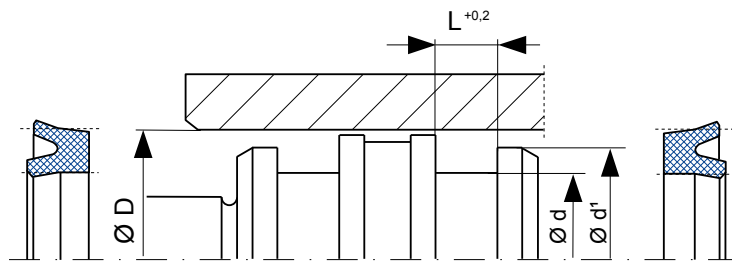

Ø d	Ø D	Ø d'	L	Numer katalogowy
40	25	35	9,5	K1-245.851
40	25	35	10	K1-245.876
45	30	40	9,5	K1-245.852
45	30	40	10	K1-245.877
50	35	45	9,5	K1-245.853
50	35	45	10	K1-245.878
55	40	50	9,5	K1-245.854
55	40	50	10	K1-245.879
60	45	55	9,5	K1-245.855
60	45	55	10	K1-245.880
63	48	58	9,5	K1-245.856
63	48	58	10	K1-245.881
65	50	60	9,5	K1-245.857
65	50	60	10	K1-245.882
70	50	64	12,5	K1-245.858
70	50	64	13	K1-245.883
80	60	74	12,5	K1-245.859
80	60	74	13	K1-245.884
90	70	84	12,5	K1-245.860
90	70	84	13	K1-245.885
100	80	94	12,5	K1-245.861
100	80	94	13	K1-245.886
110	90	104	12,5	K1-245.862
110	90	104	13	K1-245.887
115	95	109	12,5	K1-245.863
115	95	109	13	K1-245.888
125	100	117	15,5	K1-245.864
125	100	117	16	K1-245.889
125	100	117	16,2	K1-245.865
140	115	132	15,5	K1-245.890
140	115	132	16,2	K1-245.866
150	120	140	19	K1-245.891
150	120	140	19,8	K1-245.867
160	130	150	19	K1-245.892
160	130	150	19,8	K1-245.868
180	150	170	19	K1-245.893
180	150	170	19,8	K1-245.869
200	170	190	19	K1-245.894
200	170	190	19,8	K1-245.870
200	170	190	20	K1-245.895
225	195	215	19	K1-245.871
225	195	215	19,8	K1-245.896
250	220	240	19	K1-245.872
250	220	240	19,8	K1-245.897
250	220	240	20	K1-245.873
280	250	270	19	K1-254.898
280	250	270	19,8	K1-254.874
300	270	290	20	K1-254.899
300	270	290	20	K1-254.875
320	290	310	20	K1-254.900